

SOTTOMOTORE EXCF/FE 250/350

SKID PLATE EXCF/FE 250/350

ACERBIS®

COD. 5000005691

ACERBIS PARTS



A-(1 pcs.)




B-(2 pcs.)




C-(2 pcs.)



D-(2 pcs.)




E-(1 pcs.)

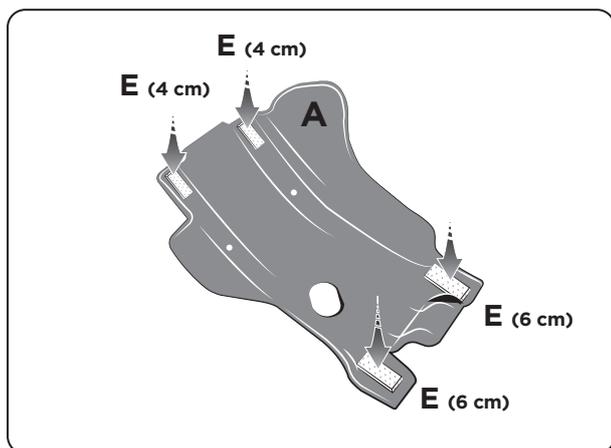


1. Cut the sponge E and install it following the dimensions and positions indicated.

Tagliare la spugna E ed installarla seguendo le misure e posizioni indicate.

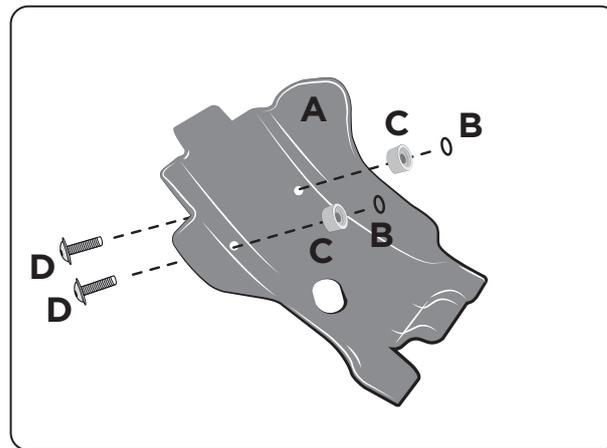


2. Introduce in the skid plate the screw D, the spacer C and the or B included .

Inserire nel sottomotore la vite D, il distanziale C e l'oring B in dotazione.

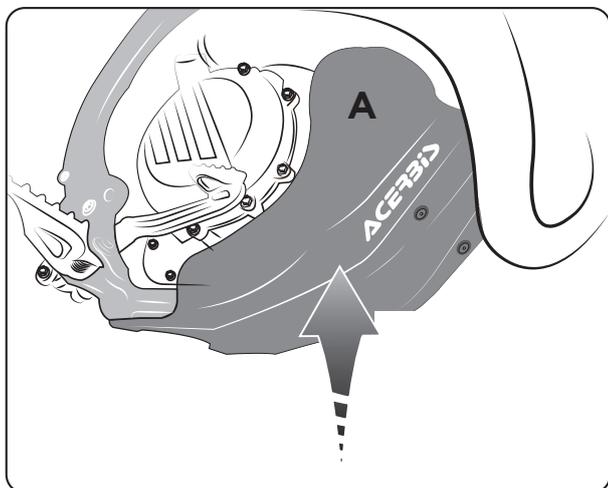

3. Place the skid plate on the frame.

Posizionare il sottomotore sul telaio.

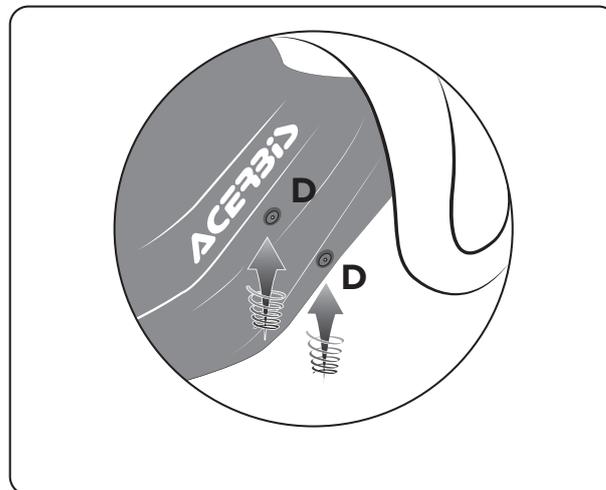

4. Fasten the screws D.

Serrare le due viti D.

WARNING!

Use at your own risk. Check the security of your device before you ride. Be sure that you follow the instructions installing the Acerbis products. Do not ride if there is missing or damaged hardware. If this is the case, take the item immediately back to your dealer. Make sure the throttle and other controls are free every time you ride. Lack of attention to instruction and warning could lead to interference with the controls, loss of control, and an accidents. Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis is original parts are used during fitting. Acerbis makes no guarantees or representations, express or implied, regarding the fitness of its products for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its product protect individuals or property from injury or death or damage.