


**ACERBIS PARTS**



**A-** (1 pcs.)



**B-** (1 pcs.)



**C-** (1 pcs.)



**D-** (1 pcs.)



**E-** (1 pcs.)



**F-** (2 pcs)




**G-** (2 pcs)




**H-** (1 pcs.)


- 1.** Smontare il sottomotore originale togliendo le 2 viti.  
**Remove the original skid plate unscrewing the two screws.**

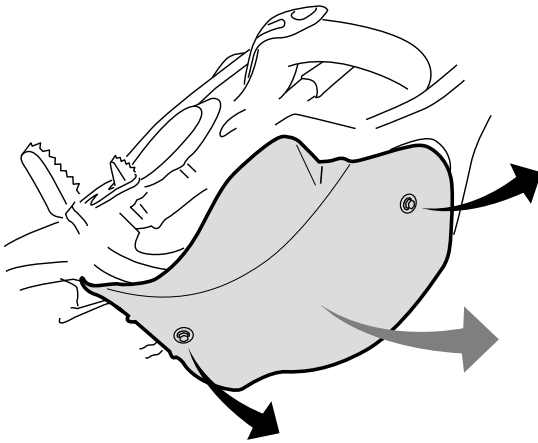


- 2.** Inserire nel sottomotore A le bocche E/C, i tappini G e le rondelle F.  
**Insert in the skid plate A the bushing E/C, the plugs G and the washers F.**

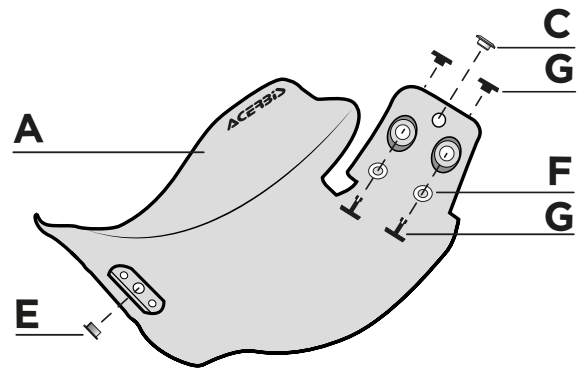

- 3.** Montare la staffa H sul telaio.  
**Assemble the bracket H on the frame.**

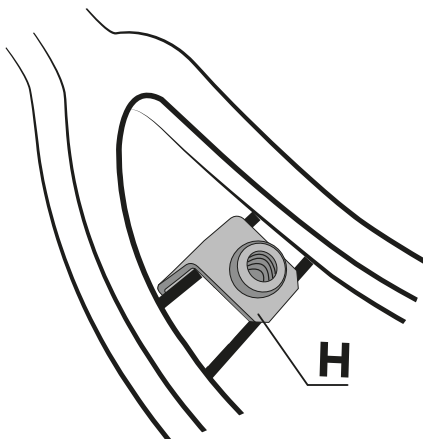

- 4.** Posizionare sul telaio il sottomotore Acerbis A e bloccarlo utilizzando la vite B.  
**Place the skid plate A on the frame and fix it using the screw B and the screw D.**

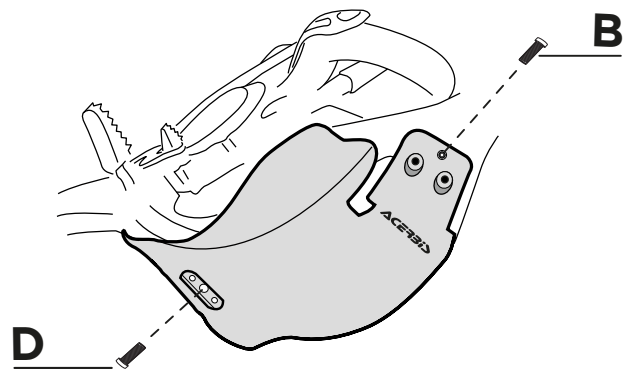

**WARNING!**

Use at your own risk. Check the security of your device before you ride. Be sure that you follow the instructions installing the Acerbis products. Do not ride if there is missing or damaged hardware. If this is the case, take the item immediately back to your dealer. Make sure the throttle and other controls are free every time you ride. Lack of attention to instruction and warning could lead to interference with the controls, loss of control, and an accidents. Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis original parts are used during fitting. Acerbis makes no guarantees or representations, express or implied, regarding the fitness of its products for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its product protect individuals or property from injury or death or damage.