


# SKID PLATE YAMAHA YZF 450

## SOTTOMOTORE YAMAHA YZF 450

**ACERBIS®**

COD. 500005809

### ACERBIS PARTS



**A-** (1 pcs.)



**B-** (3 pcs.)




**C-** (1 pcs.)




**D-** (1 pcs.)



**E-** (2 pcs.)




**F-** (1 pcs.)

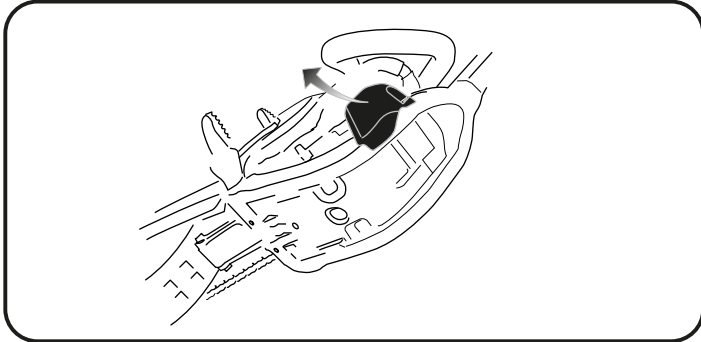


### 1. Remove the original protection.

1. Smontare la protezione originale.

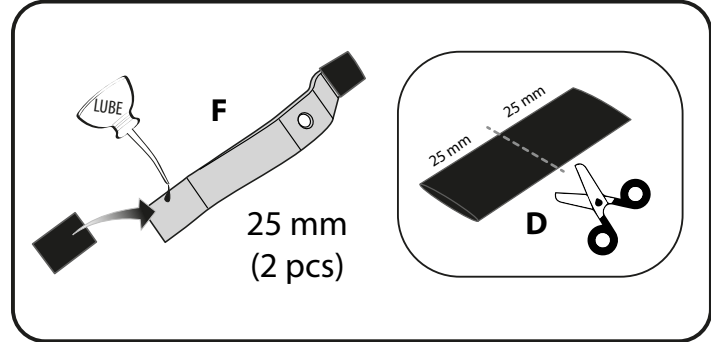


### 2. Put on the bracket F the two pads.

2. Infilare sulla staffa F i due gommini.

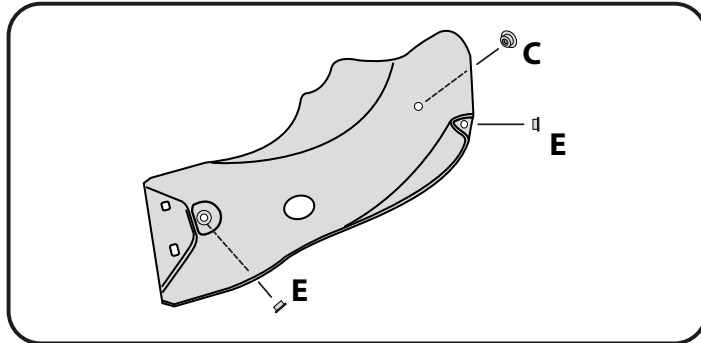


### 3. Mount the bushings C/E on the skid plate.

3. Montare le boccole C/E sul sottomotore.

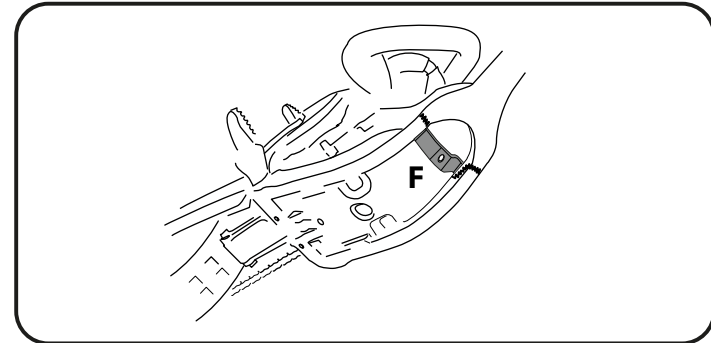


### 4. Put the bracket F on the frame.

4. Posizionare la staffa F all'interno del telaio.

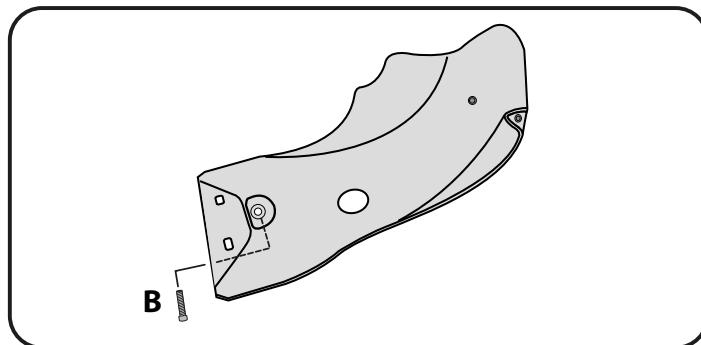

### 5. Put the skid plate and screw the screw B with out tighten it.

5. Posizionare il sottomotore e avvitare la vite B senza stringere.

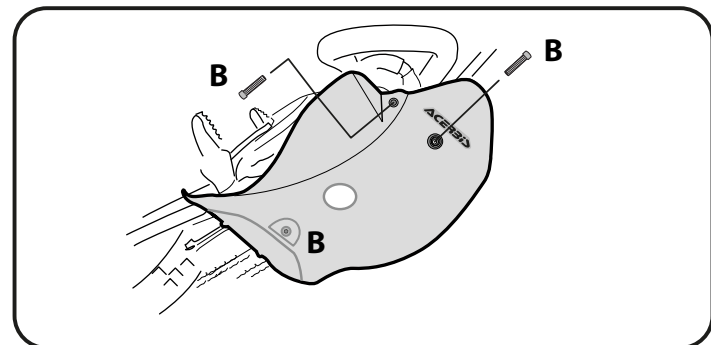

### 6. Introduce the screw B in the bracket F with out tighten it, then the lateral screw B, and finally tighten all screws B.

6. Inserire la vite B nella staffa F senza stringere, poi la vite B laterale ed infine serrare tutte le viti B.

### WARNING!

Use at your own risk. Check the security of your device before you ride. Be sure that you follow the instructions installing the Acerbis products. Do not ride if there is missing or damaged hardware. If this is the case, take the item immediately back to your dealer. Make sure the throttle and other controls are free every time you ride. Lack of attention to instruction and warning could lead to interference with the controls, loss of control, and an accidents. Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis is original parts are used during fitting. Acerbis makes no guarantees or representations, express or implied, regarding the fitness of its products for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its product protect individuals or property from injury or death or damage.