




SKID PLATE BETA 250/300 2T 2020

SOTTOMOTORE BETA 250/300 2T 2020

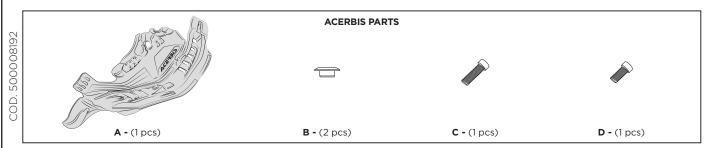


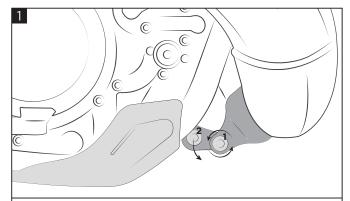

Remove the screw (2) and loosen the screw (1). Rimuovere la vite (2) ed allentare la vite (1).



Remove the original skid plate. Smontare il sottomotore originale.

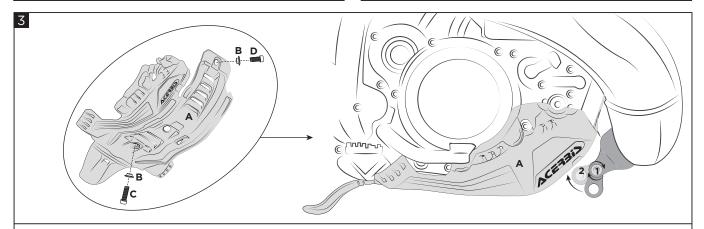

Place the Acerbis skid plate (A) on the frame and secure it using two bushings (B), the screw (C) and the screw (D). Then re-insert the screw (2) and tighten the screw (1).

Posizionare il sottomotore (A) sul telaio e fissarlo tramite le due boccole (B), la vite (C) e la vite (D). Infine reinstallare la vite (2) e stringere la vite (1).

WARNING!

Use Acerbis' products at your own risk. Check the safety of your device before you ride. Be sure that you follow the instructions for installing the Acerbis' products. Do not ride if there is missing or damaged hardware. If this is the case, take the item immediately back to your dealer. Make sure the throttle and other controls are free every time you ride. Not following these instructions and warnings could lead to interference with the controls, loss of control, and accidents. Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis' original parts are used during installation. Acerbis makes no guarantees or representations, express or implied, regarding the fitment of its product for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its products protect individuals or property from injury or death or damage.

EUROPE

ACERBIS ITALIA S.P.A. VIA SERIO, 37 24021 ALBINO (BG) ITALY

U.S.A.

ACERBIS U.S.A. INC. MAIL P.O. BOX 2030 SUN VALLEY, ID 83353 SHIP 110 LINDAY CIRCLE KETCHUM, ID 83340 U.S.A.

UNITED KINGDOM

ACERBIS U.K LTD UNIT 2 LUTON ENTERPRISE PARK SUNDON PARK ROAD LUTON, BEDFORDSHIRE LU3 3GU GREAT BRITAIN